

# XVR301-16G



## Key Features

- Support H.265/H.264 video formats
- Support audio over coaxial cable
- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- 16-channel BNC input
- Support 1-ch HDMI output, 1-ch VGA output at up to 1920\*1080
- Long transmission distance over coaxial cable


## Specifications

Model	XVR301-16G
Video/Audio Input	
Analog Video Input	16-ch, BNC
IP Video Input	8-ch(only IP up to 16ch), each channel up to 8MP
Supported Analog Camera Types	<p><b>Support AHD input:</b>                      5MP@12fps                      4MP@15fps                      1080P@30fps                      720P@30fps</p> <p><b>Support TVI input:</b>                      5MP@12fps                      4MP@15fps                      1080P@30fps                      720P@30fps</p> <p><b>Support CVI input:</b>                      1080P@30fps                      720P@30fps</p> <p><b>Support CVBS input</b></p>


Audio Input	1-ch, RCA	
<b>Network</b>		
Incoming Bandwidth	40Mbps (up to 56Mbps after all analog camera conversion)	
Outgoing Bandwidth	64Mbps	
Remote Users	128	
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE	
<b>Video/Audio Output</b>		
VGA Output	1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	
HDMI Output	1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	
Audio Output	1-ch, RCA	
Two-way Audio	1-ch, RCA	
Synchronous Playback	16-ch	
<b>Encoding</b>		
Recording Resolution	5MP Lite/4MP Lite /1080P/1080P Lite/720P/D1/CIF	
Recording Frame Rate	<b>Main stream:</b>	<b>Sub stream:</b>
	5MP Lite@6fps	D1@6fps
	4MP Lite@8fps	D1@8fps
	1080P Lite@15fps	D1@6fps
	720P@15fps	D1@10fps
<b>Hard Disk</b>		
SATA	1 SATA interface	
Capacity	Up to 6TB for each HDD	
<b>External Interface</b>		
Network Interface	1 RJ45 10M/100M self-adaptive Ethernet Interface	
USB Interface	Rear panel: 2 x USB2.0	
Serial Interface	1 x RS485	
<b>General</b>		
Power Supply	12V DC Power Consumption: ≤ 10 W( without HDD )	
Working Environment	-10°C ~ + 55°C ( +14°F ~ +131°F ), Humidity ≤ 90% RH(non-condensing)	

Dimensions(W×D×H)	260mm ×240mm× 46mm (10.2" × 9.4"×1.8")
Weight ( without HDD )	≤1.1 Kg ( 2.42lb )

## Dimensions

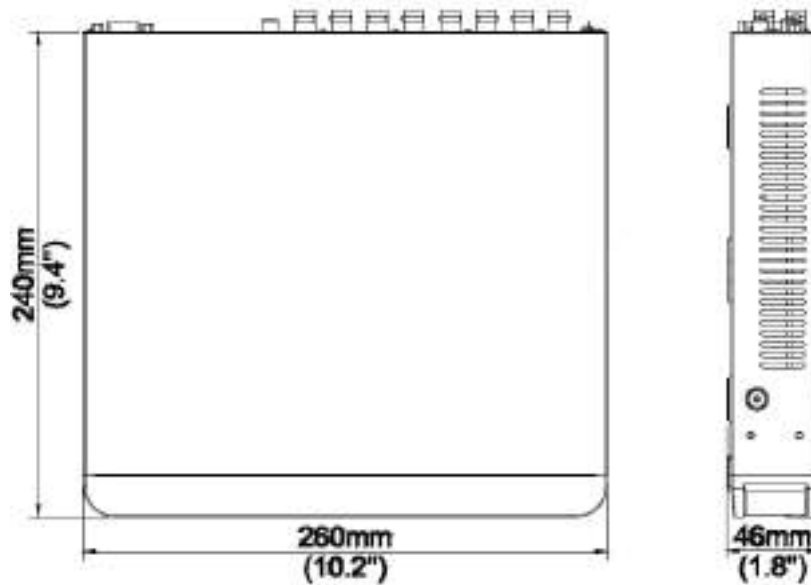

## Rear Panel

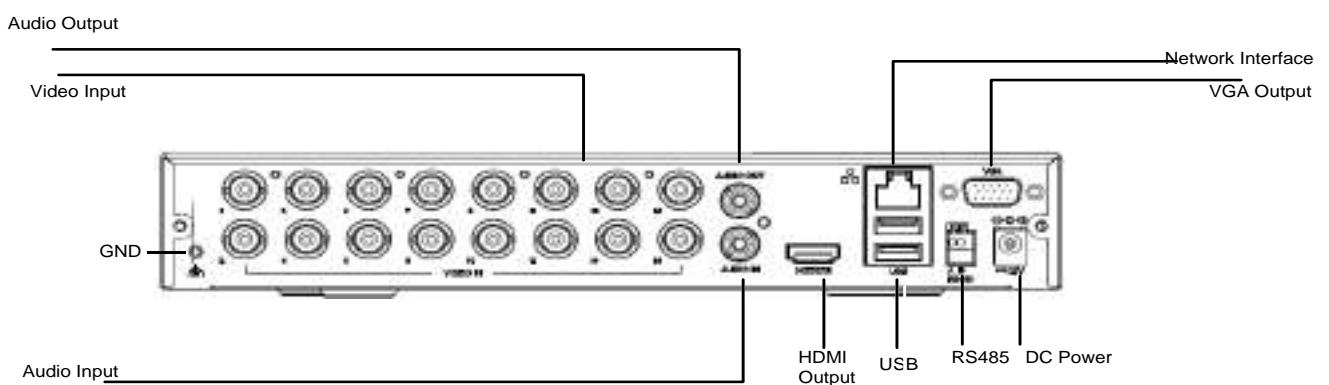

### Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2021 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\* Product specifications and availability are subject to change without notice.